





COSMO+PLUS

CALLISTO

J863

67"L x 32"W x 23"H

APPROX. OPERATING GALLONS: 62

- Sleek, comtemporary look
- High-gloss/high-impact, UV-resistant acrylic will not dull or fade
- Installation: Freestanding
- Magnetic access panel for easy deck mount faucet installation
- Leveling feet
- Integrated linear waste & overflow with white drain cap
- Available with JettaAir
- JettaAir features floating remote control for easy operation
- JettaAir available with seamless air injectors around tub perimeter
- JettaAir blower must be remote mounted at installation





COLORS AVAILABLE: White



ABOVE FLOOR DRAIN KIT


- Freestanding tub rough-in
- Install before tile
- Designed to be installed in a 8" to 10" joist space
- Can be installed with waterproof membrane


Sold separately. Not required for tub install.





TECNINICAL SPECIFICATIONS

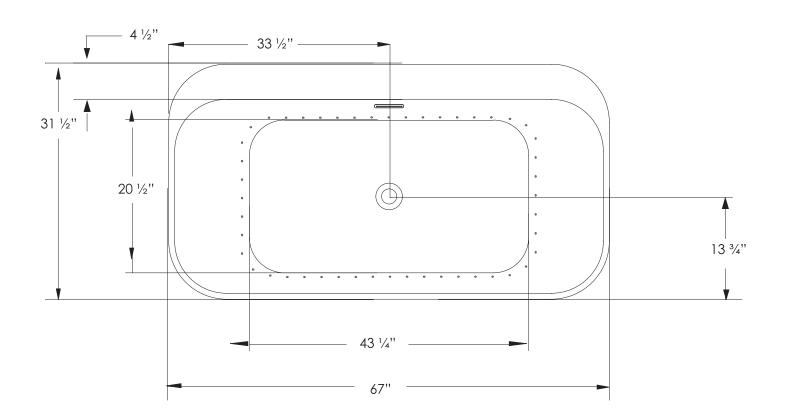

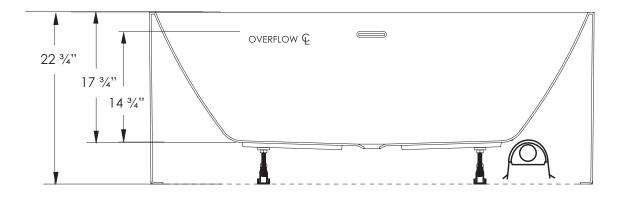



ELECTRICAL SPECIFICATIONS

Required Electrical Service 110/115 Volts Standard Air 20 amp GFI Each blower must be protected by a dedicated GFI breaker (refer to local codes). Cannot be more than 15 ft from the tub.

CODES/STANDARDS APPLICABLE

Specific model meets or exceeds the requirements forthe following standards: ANSI, ASME



INSTALLATION: Measure tub before installing.

Dimensional variance on drawings may be $\pm 1/2$ inch and are subject to change without notice.

© 2023 Jetta Corporation. All rights reserved. Specifications are subject to change without notice. REV 4/23

